







1.1

1.1.1


--	--


--	--


--	--




1.1.2

	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	

	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	


	
<input type="checkbox"/>	

	
<input type="checkbox"/>	





2.2.2

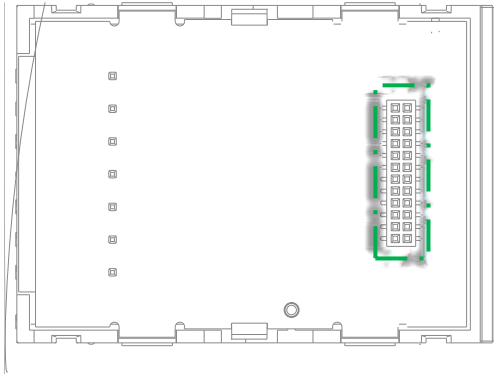


2.2.3




2.2.4


2.3













## 4.1

---



### 4.1.1

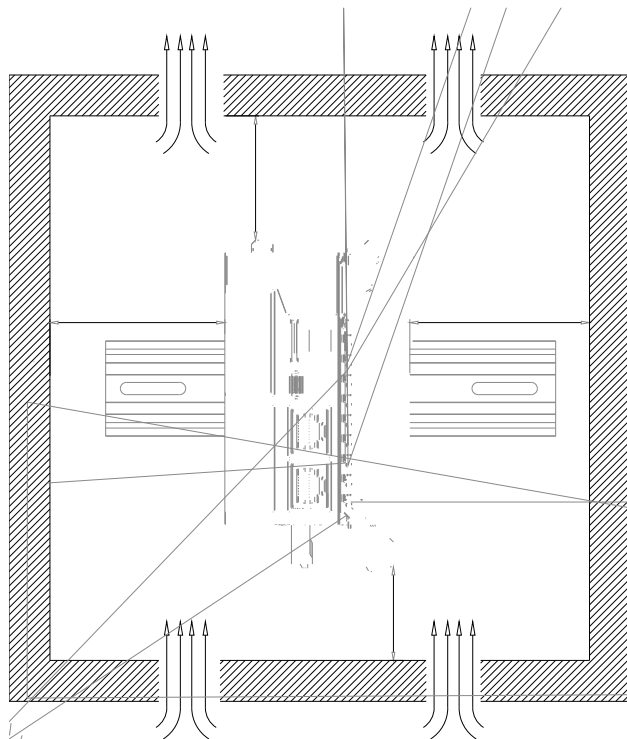

4.1.2

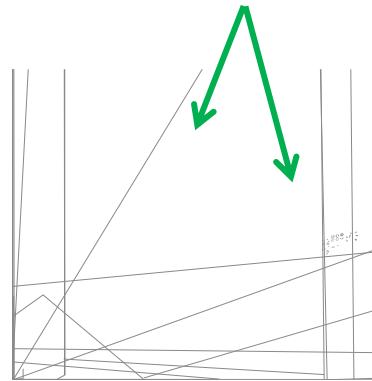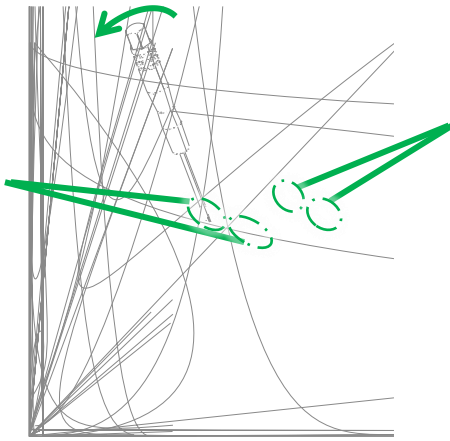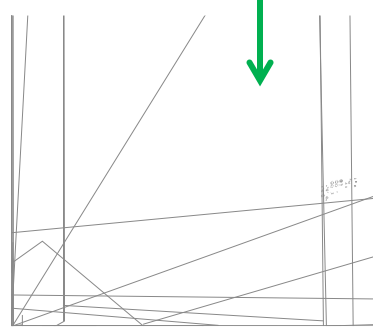
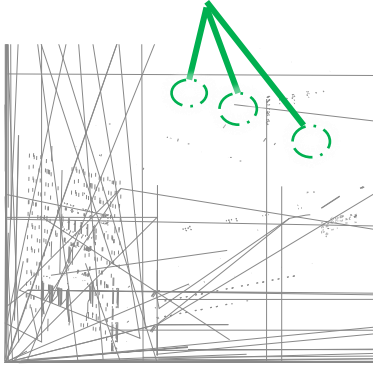



4.1.3





4.2.2

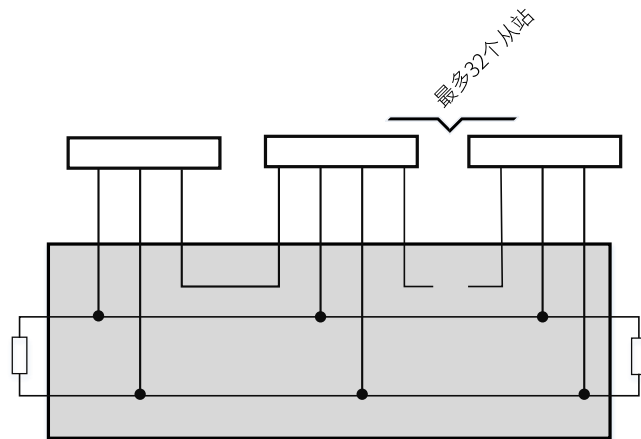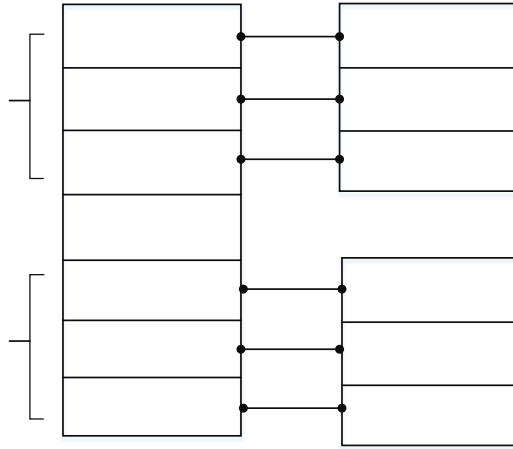

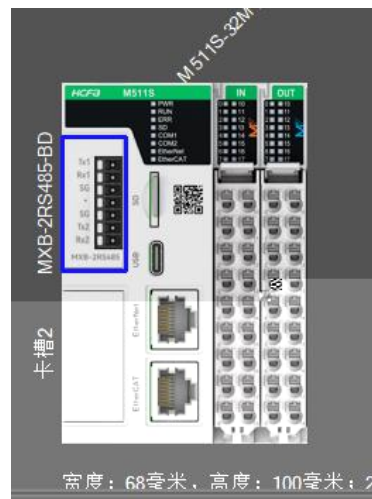

主站模式后, 您可以到工

注: 延迟时间是指COM口在任一次数据发送之前的等待时间; 当设置COM为3  
Serial 1时, 请按照1的格式设置 Modbus 寄存器地址。



